

Range Specifications



535 rue Pierre Levasseur - CS 60263
44158 ANCENIS - FRANCE

T. +33 (0) 2 51 14 14 40
F. + 33 (0) 2 40 96 32 36

www.agrisem.com
agrisem@agrisem.com



Your Dealer:



CULTIPLOW®

	Silver	Gold Rigid	Gold Foldable	Platinum Rigid	Platinum Foldable
Frame	Single Beam ø120 mm	Single Beam ø200 mm	Double Beam ø160+200 mm	Single Beam ø200 mm	Single Beam 200x200 mm
Under frame clearance (cm)	65	85	85	100	100
Working width (cm)	10 to 25	15 to 35	15 to 35	15 to 45	15 to 45
Blades/ Security	TCS 550 / BC & SR	TCS 650/BC TCS 740 / SR	TCS 650/BC TCS 740 / SR	TCS 750 / BC, SH & SR	TCS 750 / BC & SR
Rollers	Cage, Combimulch, Steel-Pack	Cage, T-Sem, U-Sem, Combimulch, Steel- Pack	Cage, T-sem, U-Sem, Steel-Pack	Cage, T-Sem, U-Sem, Combimulch, Steel- Pack, Double-Spike	Cage, T-Sem, U-Sem, Steel-Pack

Models	2,50m Rigid	3,00m Rigid	3,50m Rigid	4,00m Rigid	4,00m Retractable	4,50m Foldable	6,00m Foldable
Silver Power (ch)	70-120	90-150	-	-	-	-	-
Gold & Plati- num Power (ch)	90-180	110-210	150-230	170-250	170-250	200-280	280-380
Number of blades (Silver)	4	5	-	-	-	-	-
Number of blades (Gold & Platinum)	3	4	5	6	6	6	8
Silver weight with roller Cage (kg)	757	904	-	-	-	-	-
Gold weight with roller Cage (kg)	1 593	1 911	2 269	2 627	3 034	4 613	5 361
Platinum weight with rol- ler Cage (kg)	1 640	1 980	2 350	2 720	3 140	3 630	4 060



CULTILOW® is an unique concept of decompaction.

The machine is mounted with sretracted point blade.

This technology patented by AGRISEM ensures optimal decompaction across the width.

The CULTILOW® machine loosens by keeping the fertility of the soil because horizons are not mixed.

This machine can be used to facilitate the transition to soil conservation technique and direct seeding.

Frame
200x200 mm beam

Pushing bar
Centralized setting

Spring security
(or optional bolt security)
Unequalled clearance

Combimulch 35
Preparation of the soil on the surface

Standard coupling
Cat. 3

Carbide tip
Serial: protection against wear
Optional: Socs Easy-Carbi

Parking stand
Uncoupling total security

Ø526 cage roller
Several rollers according to your type of soil

Multistop
Simplified setting of the working depth

Shifted tip blade
TCS 750

Platinum HD Version




Strongest model specially designed for high power and difficult conditions

- » TCS 30x750 blade
- » Available in shearbolt, spring safety
- » CAT. 4 and 3 linkage


Silver	Shallow fissuring on light soils on cereals crops and orchards	15 to 25 cm	
Gold	Heavy subsoiler for almost type of soil, for main cereal crops	15 to 35 cm	
Platinum	Designed for heavy soils residues conditions and crops which need deep loosening	15 to 45 cm	
Platinum HD	Designed for hardest heavy soils which needs a strong subsoiling	15 to 45 cm	

Agronomy

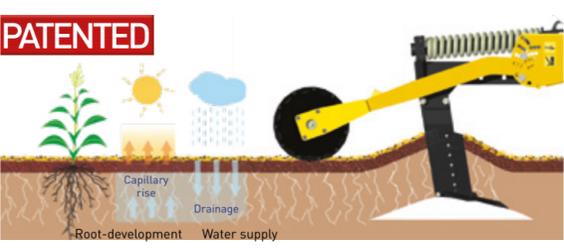


- » No disturbance of horizons
- » Vertical cracking by the creation of a wave
- » Helps root development
- » Breaks the plow pan
- » Better access to the water
- » Better water infiltration

Performance

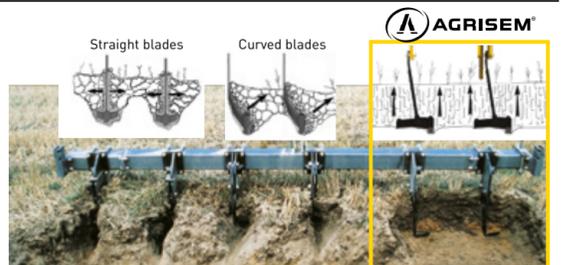


- » Homogeneous soil loosening on the entire width
- » Without «blockage effect»
- » Without creation of clods
- » Increase of yield potential

Economy

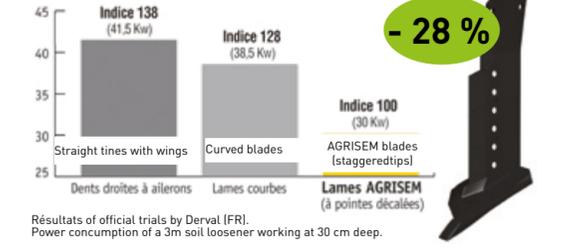

- » Nearly 30% less power than a traditionnal soil loosener
- » Improved productions
- » Reduction the number of passage to structure the soil

Strong frame

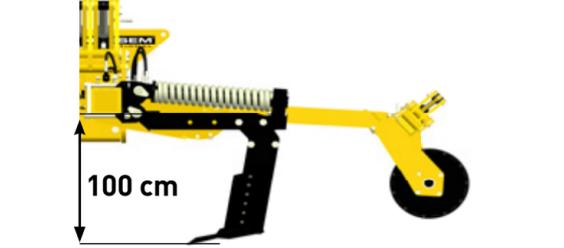

- » Important release under the frame
- » Frame made for any type of use
- » Different versions according to your equipments

Technology



- » Wearing parts easy to change
- » Tungsten carbide protection available on every parts

Exclusivity



Grassland Cultilow
Ø540 Flexi-Sem roller